


**NEXUS® Model 1 I/O AC
Standalone Controller**

CTR-X11.3-S-01 Series

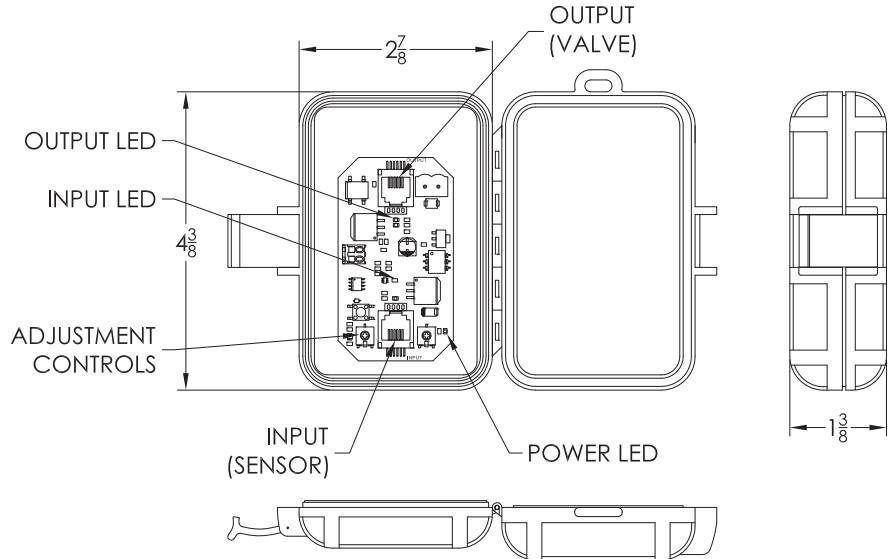

- ▶ **Description**
24VAC standalone electronic controller used to control a single pre-tempered shower, watercloset, or lavatory valve.
- ▶ **Program Type** (choose one) Port # 1

<input type="checkbox"/> One Cold	(C)
<input type="checkbox"/> One Flush	(F)
<input type="checkbox"/> One Hot	(H)
<input type="checkbox"/> One Shower	(S)
<input type="checkbox"/> Special Order - Please Contact Factory	_____
- ▶ **Timing Adjustment Option** (choose one)

<input type="checkbox"/> Standard	
<input type="checkbox"/> Custom Lockout Times	(Waterclosets)
<input type="checkbox"/> Custom Run Times	(Showers)
<input type="checkbox"/> Custom Lockout Times and Runtimes	(WC & Shower)
- ▶ **Accessories**
See Accessories Section of the I-CON catalog or contact our Customer Service Team for details.

- Specifications**
- Specifically designed for penal use and other vandal prone areas to conserve potable water consumption
 - 24 VAC power with low power consumption
 - Electrical telephone plug type connectors for sensor and solenoid
 - Ability to be remotely located up to three hundred (300) feet from the associated fixtures
 - UL Listed (E308296) and independently tested
 - Adjustable program times without dip switches
 - Amber power LED illuminates with power
 - Green LEDs illuminate at each port to show the port is active
 - Red LEDs indicate block times are in effect
 - Power surge protection and voltage spike protection

This space is for Architect/Engineer approval



The information contained in this document is subject to change without notice.