


**TruFIRE® Model
24VAC Solenoids**

SLD-0914 Series

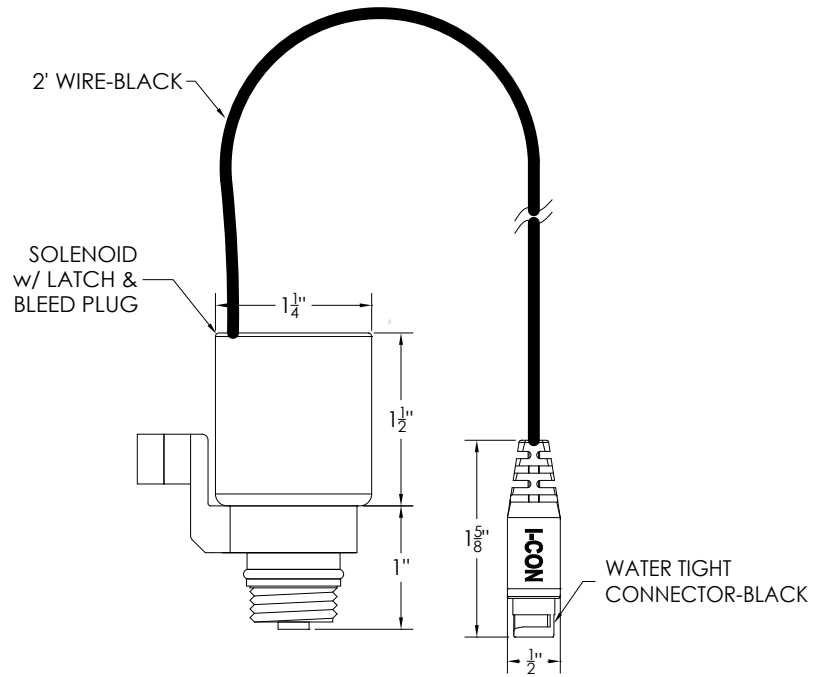

► **Description**

The I-CON TruFIRE® 24VAC Solenoid attaches to and operates any of the I-CON flush valves, lavatory valves, shower valves, and retrofit cartridges.

► **High Velocity Flow** (choose one)

- with No Extension (Extension Required for Use)
- 6' Extension
- 15' Extension
- 25' Extension
- 35' Extension
- 60' Extension

► **Standard Flow** (choose one)

- with No Extension (Extension Required for Use)
- 6' Extension
- 15' Extension
- 25' Extension
- 35' Extension
- 60' Extension

► **Accessories**

For additional accessories, see the Accessories Section of the I-CON catalog or contact our Customer Service Team for details.

Specifications

- Voltage - 24VAC 50/60Hz
- Inrush Current - 0.25 AMP
- Holding Current - 0.18 AMP
- Closing Type - Slow Closing with Soft Close Feature
- Sealing Surface - EPDM
- Max. Operating Pressure - 100 PSI
- Min. Operating Pressure - Positive Close
- Max. Fluid Temperature - 120°F

This space is for Architect/Engineer approval



The information contained in this document is subject to change without notice.